
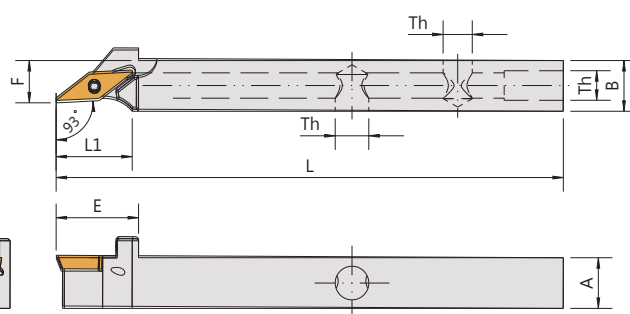



- ◎Direct coolant supply through the turning tool.
- ◎30 to 150% longer tool life for different kind of materials.
- ◎Improved chip breaking, particularly at pressures above 40 bar.
- ◎Shorten processing time by high cutting speed.

▼Recommended Inserts 建議刀片品牌: ACC

Order No.	Insert	Dimensions(mm)							Parts			Wrench	
Right / Left		A	B	L	L1	E	F	Th					
ASDJCR/L-1212JX11-F10	DCMT11T3	12	12	120	19	19.5	10	5/16"	CS35095	CS9-3003 CS9N5/16	CS9NP	FT-15	LW040
ASDJCR/L-1616JX11-F14		16	16	120	19	19.5	14	1/8"		CS9-3003 CS9PT1/8	-		



- ◎Direct coolant supply through the turning tool.
- ◎30 to 150% longer tool life for different kind of materials.
- ◎Improved chip breaking, particularly at pressures above 40 bar.
- ◎Shorten processing time by high cutting speed.

Order No.	Insert	Dimensions(mm)							Parts			Wrench	
Right / Left		A	B	L	L1	E	F	Th					
ASVJCR/L-1212JX11-F10	VCMT1103	12	12	120	18	19.5	10	5/16"	CS25060	CS9-3003 CS9N5/16	CS9NP	FT-7	LW040
ASVJCR/L-1616JX11-F14		16	16	120	18	19.5	14	1/8"		CS9-3003 CS9PT1/8	-		