
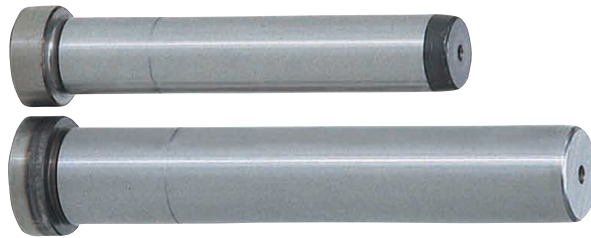



PRECISION LEADER PINS

— HEAD • PLAIN L DIMENSION SELECTION TYPE —

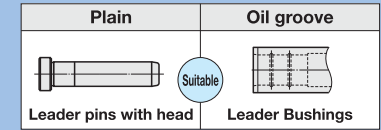


RoHS

GPH (L dimension selection type)

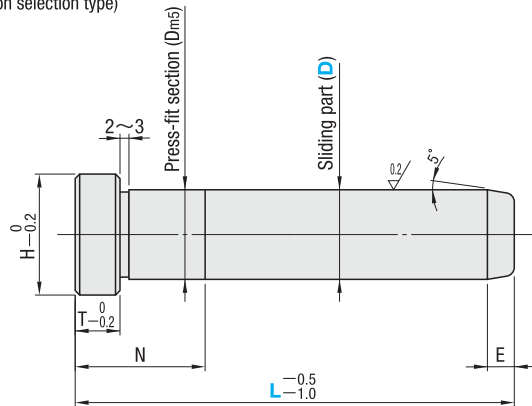

• Details of tip GPH8 • GPH10



- Recommended mold temperature for the usage of a precision leader pin and bushing is 80°C or less because of a little clearance between them. (P.878)
- A center hole may be left on one or both ends.

M SUJ2
H 58HRC~
(Induction hardening)

Sliding part D		Press-fit section D m 5		T	H	E
8	-0.015 -0.020	8	+0.012 +0.006	5	11	3
10		10			13	4
12		12			17	5
13	-0.020 -0.025	13	+0.015 +0.007		18	
16		16		8	21	
20		20			25	
25	-0.025 -0.030	25	+0.017 +0.008		30	
30		30			35	5
35	-0.030 -0.035	35			40	
40	-0.030 -0.040	40	+0.020 +0.009	10	45	8
50		50		12	55	
60	-0.030 -0.050	60	+0.024 +0.011	15	65	