
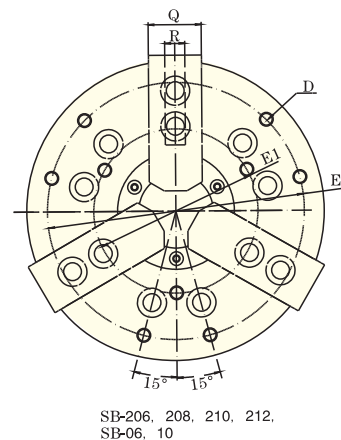
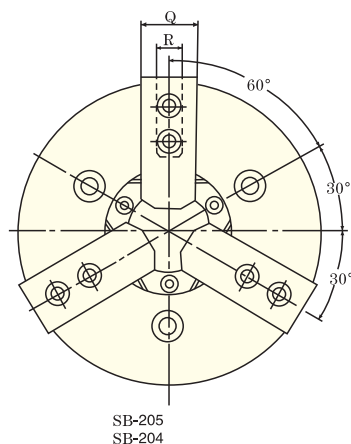


SB 三爪高速中空液压卡盘

3-JAW HIGH SPEED HOLLOW POWER CHUCKS

是一种中心通孔卡盘，适用于加工棒类等广泛的零件；
能更换硬爪；使用联接法兰。

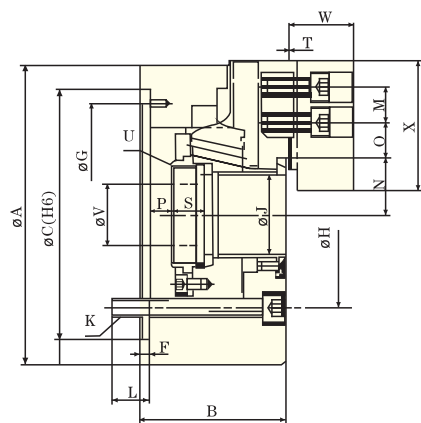

型号TYPE	A (mm)	B (mm)	C(H6) (mm)	D (mm)	E (mm)	E1 (mm)	F (mm)	G (mm)	H (mm)	J (mm)	K (mm)	L (mm)	M (mm)	N max (mm)
SB-204	110	59	85				4	-	70.6	26	3-M10×1.5P	15	14	23
SB-205	135	60	110				4	96	82.6	33	3-M10×1.5P	15	14	26.5
SB-206	168	81	140	M8	145	85	5	116	104.8	45	6-M10×1.5P	16	20	32.0
SB-208	210	91	170	M10	180	115	5	150	133.4	52	6-M12×1.75P	18	25	38.7
SB-210	254	100	220	M10	225	140	5	190	171.4	75	6-M16×2P	19	30	51.0
SB-212	304	110	220				6	190	171.4	91	6-M16×2P	25	30	61.3
SB-215	381	133	300				6	260	235.0	117.5	6-M20×2.5P	28	43	82.7

型号TYPE	N min. (mm)	O max. (mm)	O min. (mm)	P max. (mm)	P min. (mm)	Q (mm)	R (mm)	S (mm)	T (mm)	U (mm)	V (mm)	W (mm)	X (mm)
SB-204	20.3	11	6	3.5	-3.5	23	10	17.5	2	M32×1.5P	12	24	52
SB-205	23.80	19	6	1	-9	25	10	19.0	2	M40×1.5P	12	31.5	62
SB-206	29.25	24	7	11	-1	31	12	19.0	2	M55×2P	20	37	73
SB-208	35.00	30	10	14.5	-1.5	35	14	20.0	2	M60×2P	30	39	95
SB-210	46.60	34	12	8.5	-10.5	40	16	25.0	2	M85×2P	40	43	110
SB-212	56.00	46	12	8	-15	50	21	28.0	2	M100×2P	50	51	129
SB-215	77.40	46	13	8	-15	62	22	42.5	5	M130×2P	60	66	165

型号TYPE	通孔直径 Thru-Hole (DIA.mm)	柱塞行程 Plunger Stroke (mm)	爪行程(直径) Jaw Stroke (DIA.mm)	最高回转速度 Max.Speed (min ⁻¹)	最大拉力 Max.Pull Force kgf(KN)	最大静夹持力 Max.Gripping Force kgf(KN)	搭配油缸型号 Matching Cylinder	夹持范围 Gripping Range 最大Max. 最小Min.	最高使用压力 Max.Pressure kgf/cm ² (Mpa)	重量 Weigt(kg)
SB-204	26.0	10	5.4	8000	1400(13.7)	2900(28)	SH428	110 7	29(2.3)	4.0
SB-205	33.0	10	5.4	7000	1730(17)	3550(35)	SH1036	135 10	29(2.8)	6.0
SB-206	45.0	12	5.5	6000	2140(21)	5700(56)	SH1246	168 13	28(2.7)	12.5
SB-208	52.0	16	7.4	4800	3350(33)	8350(82)	SH1552	210 16	26(2.5)	22.0
SB-210	75.0	19	8.8	4200	4280(42)	11000(108)	SH1875	254 25	27(2.6)	33.6
SB-212	91.0	23	10.6	3300	5500(55)	14300(140)	SH2091	304 23	27(2.6)	55.3
SB-215	117.5	23	10.6	2500	7200(71)	18200(178)	SH2511	381 42	25(2.4)	106.8