


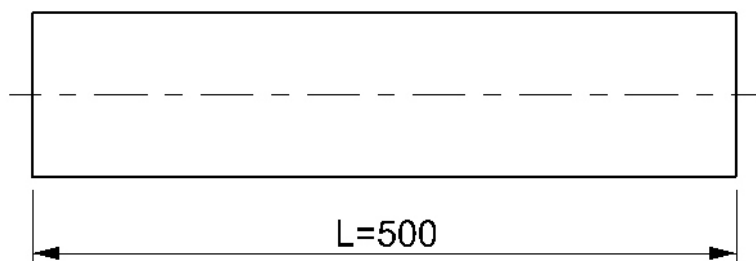


PU Stick PU 棒



Type	D
PU	15
	20
	25
	30
	35
	40

Ball Plungers 定位珠

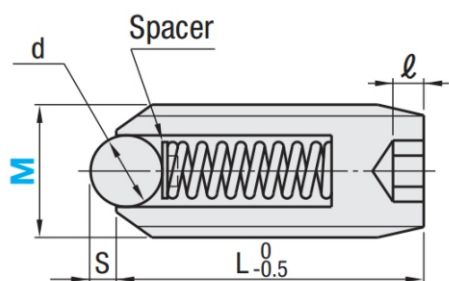

BP
(SCM435)



BPS
(SUS440C)

Type	M	d	S	L	ℓ	B	load (kgf)	
							min	max
BP (SCM435)	3	1.5	0.5	7	1	1.5	0.15	0.30
	4	2.5	0.8	9	1.5	2	0.40	1.00
	5	3	0.8	12	2.0	2.5	0.50	2.00
	6	3	0.8	13	2.5	3	1.00	3.00
BPS (SUS440C)	8	4	1.0	15	2.5	4	1.30	4.00
	10	5	1.2	16	3	5	1.90	5.00
	12	7	1.8	20	3	6	2.00	6.00