


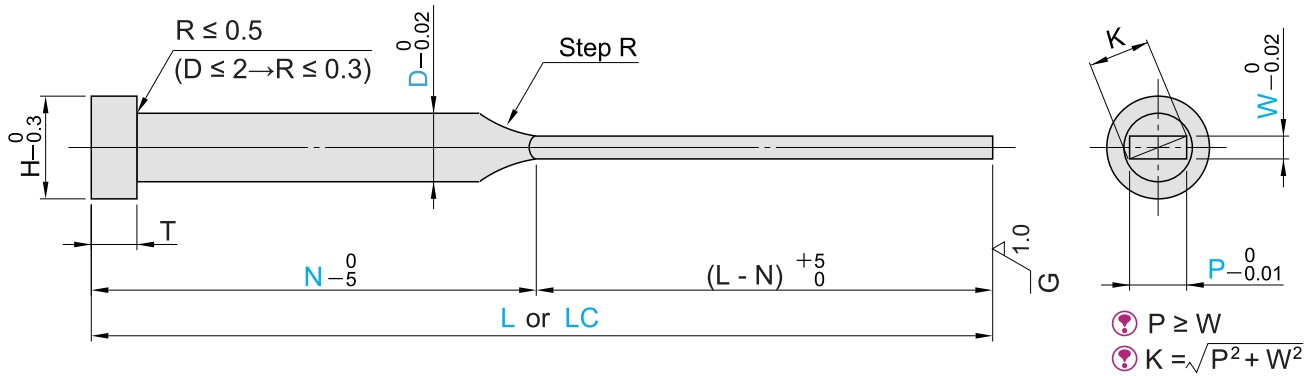

TYPE: ERN - ERNT

M SKD61 + Nitrided

H Surface: 900HV~ Base Material: 40~45HRC

TYPE: ERD - ERDT

M SKD61 + Nitrided

H Surface: 900HV~ Base Material: 48~52HRC

L and LC Tolerance

L	+5 +0.1
LC	+0.02 0 LC > 200 → +0.05 0

T Tolerance

T	Tolerance
4mm	0 - 0.02
6 - 8mm	0 - 0.05

4mm head		JIS head		Type		D	P 0.01mm increments	W 0.01mm increments	L or LC L → 1mm increments LC → 0.01mm increments	Kmax.	N 1mm increments	Nmin.
H	T	H	T	4mm head	JIS head							
—	—	3	—	—	—	1.5	0.50~ 1.30	—	40.00~250.00	1.4	—	23
—	—	4	—	—	—	2	0.80~ 1.80	—	40.00~300.00	1.9	—	26
—	—	5	—	—	—	2.5	0.80~ 2.30	—	—	2.4	—	27
—	—	6	—	—	—	3	0.80~ 2.80	—	—	2.9	—	29
—	—	7	—	—	—	3.5	1.00~ 3.30	—	—	3.4	—	31
7	—	8	—	—	—	4	1.00~ 3.80	—	—	3.9	—	33
8	—	9	—	—	—	4.5	1.20~ 4.30	—	—	4.4	—	40
9	—	10	—	—	—	5	1.50~ 4.80	—	—	4.9	—	—
10	—	11	—	—	—	5.5	1.80~ 5.30	—	—	5.4	—	—
11	—	13	—	—	—	6	2.00~ 5.80	—	—	5.9	—	—
14	—	14	—	—	—	6.5	2.00~ 6.30	—	—	6.4	—	—
15	—	15	—	—	—	7	2.30~ 6.80	—	—	6.9	—	—
17	—	17	—	—	—	8	2.30~ 7.80	—	—	7.9	—	—
—	—	—	—	—	—	8.5	2.30~ 8.30	—	—	8.4	—	—
—	—	—	—	—	—	10	3.00~ 9.80	—	—	9.9	—	—
—	—	—	—	—	—	10.5	3.00~ 10.30	—	—	10.4	—	—
—	—	—	—	—	—	12	3.50~ 11.80	—	—	11.9	—	—